


Valves

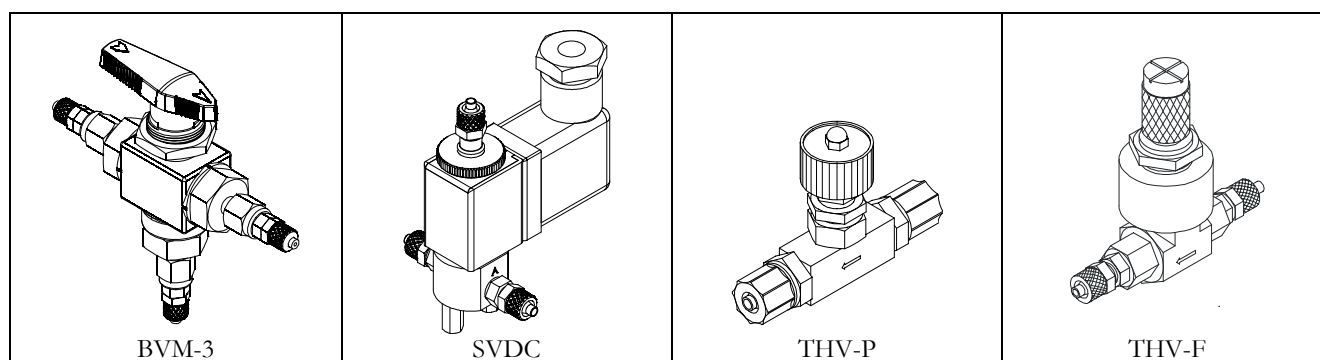

order number		description
BVM-3		3-way ball valve, manually operated, SS, fittings for 4x6 mm FEP tubing (3x5 mm on request)
SVDC 24	*	3-way solenoid valve, fittings for 4x6 mm FEP tubing (3x5 mm on request), SS, 24V DC / 6W, with plug
SVDC Plug		electric connector
SVAC-PWR		24 VDC power supply, to operate SVDC 24 at 100-240 VAC, 15 W, screw terminals
THV-P		throttle valve, for PRESS (bypass) configuration, fittings for 4x6 mm FEP tubing (3x5 mm on request)
THV-F		throttle valve, fine tuning, fittings for 4x6 mm FEP tubing (3x5 mm on request)

*The above solenoid valve is not suitable as spare part in BMT instruments! Please ask.